




ENERG У ІЈА енергия · ενεργεια IE IA

♦NIBE

NIBE F1245-8

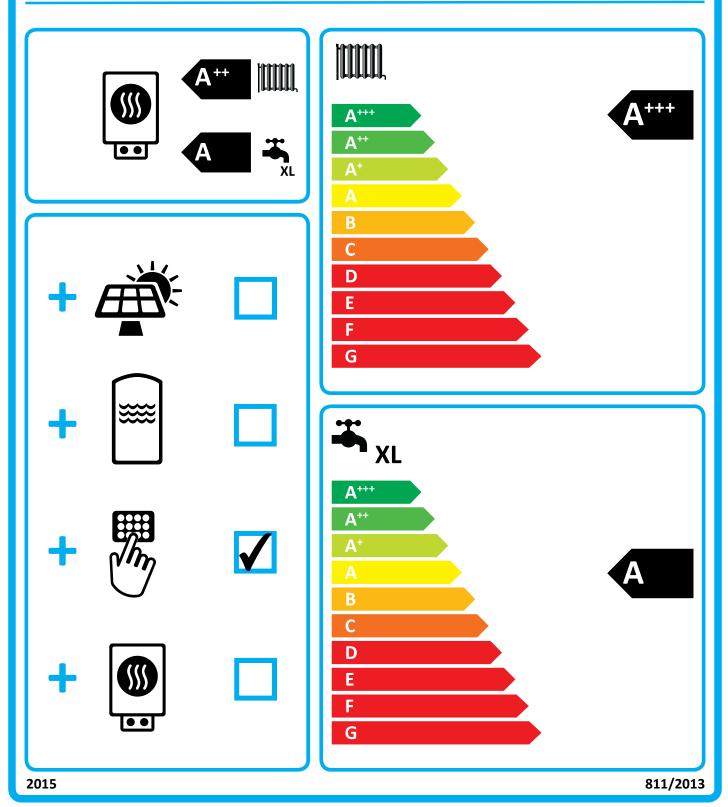

Supplier's name:	NI		
Model:	NIBE I	F1245-8	
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A+++	A++	
Water heating energy efficiency class, average climate:			
Rated heat output, average climate:	10	9	kW
Annual energy consumption for space heating, average climate	4245	4907	kWh
Annual electricity consumption for water heating, average climate	1669		kWh
Seasonal space heating energy efficiency, average climate:	187	147	%
Water heating energy efficiency, average climate:	1	%	
Sound power level LWA indoors	42		dB
Rated heat output, cold climate:	10	9	kW
Rated heat output, warm climate:	10	9	kW
Annual energy consumption for space heating, cold climate	4904	5599	kWh
Annual electricity consumption for water heating, cold climate	1669		kWh
Annual energy consumption for space heating, warm climate	2842	3255	kWh
Annual electricity consumption for water heating, warm climate	1669		kWh
Seasonal space heating energy efficiency, cold climate:	193	152	%
Water heating energy efficiency, cold climate:	100		%
Seasonal space heating energy efficiency, warm climate:	186	146	%
Water heating energy efficiency, warm climate:	1	%	
Sound power level LWA outdoors		-	dB

Data for package fiche

Controller class	V	/	
Controler contribution to efficiency	3	%	
Seasonal space heating energy efficiency of package, average climate:	190	150	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A+++	%
Seasonal space heating energy efficiency of package, cold climate:	197	156	%
Seasonal space heating energy efficiency of package, warm climate:	189	150	%

Model(s):			NIE	BE F1245-8			
Type of heat source/sink:		Brin		e-to-water			
Low-temperature heat pump:				No			
Equipped with supplementary heater:				Yes	NI		HC.
Heat pump combination heater:				Yes			
Climate condition:			A	Average			
Temperature application: Mec		Medium te	mperature (55 °C)				
Applied standards: EN14825, EN16147 ar	nd EN12102						
Rated heat output	Prated	9,20	kW	Seasonal space heating energy efficiency	η _s	147	%
Declared capacity for part load at outdoor tem	nerature Ti			Declared coefficient of performance for p	art load at outdo	or temneratu	re Ti
Tj = -7 °C	Pdh	7,4	kW	$T_j = -7 \ ^{\circ}C$	COPd	3,31	kW
Tj = +2 °C	Pdh	7,7	kW	$T_{j} = +2 °C$	COPd	3,93	kW
Tj = +7 °C	Pdh	7,9	kW	$T_{j} = +7 °C$	COPd	4,30	kW
Ti = +12 °C	Pdh	8,0	kW	Ti = +12 °C	COPd	4.73	kW
Tj = biv	Pdh	7,5	kW	Tj = biv	COPd	3,49	kW
Ti = TOL	Pdh	7,2	kW	Ti = TOL	COPd	3,09	kW
Tj = -15 °C (if TOL < -20 °C)	Pdh	- /-	kW	Tj = -15 °C (if TOL < -20 °C)	COPd	-,	kW
Bivalent temperature	T _{biv}	-5	°C	Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcych	-	kW	Cycling interval efficiency	COPcyc		-
Degradation co-efficient	Cdh	1,00	-	Heating water operating limit	WTOL	65	°C
Power consumption in modes other than active Off mode	e mode P _{OFF}	0,002	kW	Supplementary heater Rated heat output	Psup	2,0	kW
Thermostat-off mode	P _{TO}	0	kW				
Standby mode	P _{SB}	0,007	kW	Type of energy input		Electric	
Crankcase heater mode	Рск	0,014	kW		Į		
Other items							
Capacity control		fixed		Rated air flow rate, outdoors			m³/h
				Rated water flow rate, indoor hea	t		
Sound power level, indoors/outdoors	L _{WA}	42/-	dB	exchanger		0,79	m³/h
				Rated brine or water flow rate,			
Annual energy consumption	Q _{HE}	4907	kWh	outdoor heat exchanger		1,43	m³/h
For heat pump combination heater:							
Declared load profile		XL		Water heating energy efficiency	η_{wh}	100	%
Daily electricity consumption	Q _{elec}	7,60	kWh	Daily fuel consumption	Q _{fuel}		kWh
Annual electricity consumption	AEC	1669	kWh	Annual fuel consumption	AFC		GJ
			<u> </u>	1			
Approved by:	1						
Contact details	© NIBE Er	nergy Syste	ems - Box	14 - Hannabadsvägen 5 - 28521 Ma	rkaryd - Swed	len	