




ENERG У ІА енергия · ενεργεια **ΙΕ Ι**Α

♦NIBE

NIBE F2040-6 + SMO

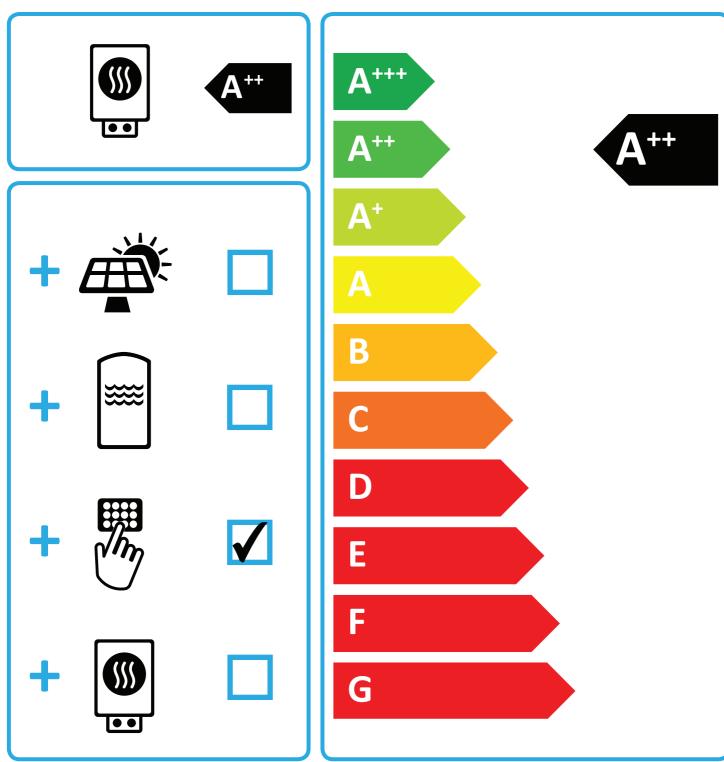

Supplier's name:	NIE			
Model:	F204	40-6		
Temperature application	35	55	°C	
Declared load profile for water				
heating				
Seasonal space heating energy	۸	A++		
efficiency class, average climate:	A+++	A++		
Water heating energy efficiency				
class, average climate:				
Rated heat output, average climate:	5	5	kW	
Annual energy consumption for	2089	3248	L/M/b	
space heating, average climate	2069	3240	kWh	
Annual electricity consumption for			kWh	
water heating, average climate			KVVN	
Seasonal space heating energy	400	404		
efficiency, average climate:	188	131	%	
Water heating energy efficiency,			%	
average climate:			70	
Sound power level LWA indoors	3	dB		
Rated heat output, cold climate:	4	6	kW	
Rated heat output, warm climate:	4	5	kW	
Annual energy consumption for	2694	4610	kWh	
space heating, cold climate	2094	4010	K V V I I	
Annual electricity consumption for			kWh	
water heating, cold climate				
Annual energy consumption for	872	1398	kWh	
space heating, warm climate	1000			
Annual electricity consumption for			kWh	
water heating, warm climate				
Seasonal space heating energy	143	116	%	
efficiency, cold climate: Water heating energy efficiency,				
cold climate:			%	
Seasonal space heating energy			1	
efficiency, warm climate:	252	179	%	
Water heating energy efficiency,				
warm climate:			%	
Sound power level LWA outdoors	5	dB		

Data for package fiche

in combination with SMO or VVM

Controller class	V					
Controler contribution to efficiency	4,0		%			
Seasonal space heating energy efficiency of package, average climate:	192	135	%			
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%			
Seasonal space heating energy efficiency of package, cold climate:	147	120	%			
Seasonal space heating energy efficiency of package, warm climate:	256	183	%			

Model(s):			F20	040-6			
Type of heat source/sink:			Air-to	p-water			
Low-temperature heat pump:				No —			_
Equipped with supplementary heater:			No (Back	up needed) No			
Heat pump combination heater:				No			
Climate condition:		Av		erage 🔰 🖌 📕			
Temperature application:		Me	dium temp	perature (55 °C)			
Applied standards: EN14511, EN14825, EN	N16147 and	EN12102					
				Seasonal space heating energy			
Rated heat output	Prated	5,3	kW	efficiency	η _s	131	%
Declared conscitution part load at outdoor tom	ooraturo Ti			Declared coefficient of performance for par	land at autday	r tomporat	uro Ti
Declared capacity for part load at outdoor temp Tj = -7 °C	Pdh	4,7	kW	Declared coefficient of performance for part Ti = -7 °C	COPd	1,88	kW
Tj = +2 °C	Pdh	2,8	kW	$T_j = +2 °C$	COPd	3,26	kW
Tj = +7 °C	Pdh	1,8	kW	$T_{j} = +7 °C$	COPd	4,72	kW
Tj = +12 °C	Pdh	2,7	kW	$T_{i} = +12 °C$	COPd	6,47	kW
Tj = biv	Pdh	4,7	kW	$T_j = biv$	COPd	1,88	kW
Ti = TOL	Pdh	4,1	kW	Tj = TOL	COPd	1,77	kW
Tj = -15 °C (if TOL < -20 °C)	Pdh	.)_	kW	Tj = -15 °C (if TOL < -20 °C)	COPd	_,,,	kW
			1				
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcych		kW	Cycling interval efficiency	COPcyc		-
Degradation co-efficient	Cdh	0,99	-	Heating water operating limit	WTOL	58	°C
Power consumption in modes other than active	mode	-		Supplementary heater			
Off mode	POFF	0,007	kW	Rated heat output	Psup	1,2	kW
Thermostat-off mode	P _{TO}	0,012	kW				
Standby mode	P _{SB}	0,012	kW	Type of energy input Electric			
Crankcase heater mode	P _{CK}	0	kW				
	U.V.	-					
Other items							
Capacity control		variable		Rated air flow rate, outdoors		2526	m³/h
				Rated water flow rate, indoor heat			
Sound power level, indoors/outdoors	L _{WA}	-/50	dB	exchanger			m³/h
				Rated brine or water flow rate,			
Annual energy consumption	Q _{HE}	3248	kWh	outdoor heat exchanger			m³/h
For heat pump combination heater:					•		•
Declared load profile				Water heating energy efficiency	η_{wh}		%
	1				10011		
Daily electricity consumption	Q _{elec}		kWh	Daily fuel consumption	Q _{fuel}		kWh
Annual electricity consumption	AEC		kWh	Annual fuel consumption			GJ
Approved by:							
Contact details		nerov Svo	toms - B	ox 14 - Hannabadsvägen 5 - 28521 M	arkanud Cu	vodon	