




ENERG
енергия · ενεργεια



NIBE

AMS20-6 + BA-SVM20-200-6



55 °C

35 °C



A++

A+++



35 dB



54 dB

■ 6
■ **6**
■ 5
kW

■ 6
■ **5**
■ 6
kW



2019



811/2013




ENERG Y IJA
енергия · ενεργεια IE IA

NIBE


AMS20-6 + BA-SVM20-200-6

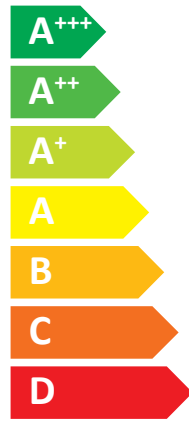

A++

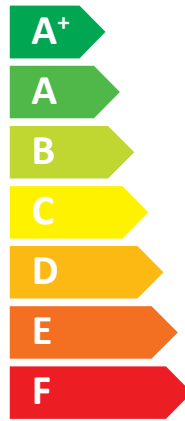

A

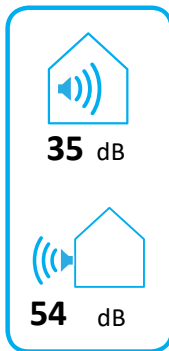

2019

811/2013



ENERG

енергия · ενέργεια

Y






IJA


IE


IA


NIBE


AMS20-6 + BA-SVM20-200-6













+ 

+ 

+ 


+ 

Supplier's name:	NIBE AB		
Model:	NIBE AMS20-6 + BA-SVM20-200-6		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A+++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	5	6	kW
Annual energy consumption for space heating, average climate	2116	3250	kWh
Annual electricity consumption for water heating, average climate	1564		kWh
Seasonal space heating energy efficiency, average climate:	200	139	%
Water heating energy efficiency, average climate:	107		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	6	6	kW
Rated heat output, warm climate:	6	5	kW
Annual energy consumption for space heating, cold climate	3487	4604	kWh
Annual electricity consumption for water heating, cold climate	1876		kWh
Annual energy consumption for space heating, warm climate	1110	1617	kWh
Annual electricity consumption for water heating, warm climate	1305		kWh
Seasonal space heating energy efficiency, cold climate:	161	119	%
Water heating energy efficiency, cold climate:	89		%
Seasonal space heating energy efficiency, warm climate:	265	178	%
Water heating energy efficiency, warm climate:	128		%
Sound power level LWA outdoors	54		dB

Data for package fiche

Controller class	CLASS VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	204	143	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	165	123	%
Seasonal space heating energy efficiency of package, warm climate:	269	182	%

Model(s):		NIBE AMS20-6 + BA-SVM20-200-6							
Type of heat source/sink:		Air/water							
Low-temperature heat pump:		No							
Equipped with supplementary heater:		Yes							
Heat pump combination heater:		Yes							
Climate condition:		Average							
Temperature application:		Medium temperature (55 °C)							
Applied standards: EN 14825:2022, EN 16147:2017+A1:2022, EN 12102-1:2022									
Rated heat output		Prated	5,6	kW	Seasonal space heating energy efficiency		η_s	139	%
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>					
Tj = -7 °C	Pdh	5,0	kW	Tj = -7 °C	COPd	1,95			
Tj = +2 °C	Pdh	2,9	kW	Tj = +2 °C	COPd	3,51			
Tj = +7 °C	Pdh	1,9	kW	Tj = +7 °C	COPd	4,99			
Tj = +12 °C	Pdh	1,7	kW	Tj = +12 °C	COPd	6,33			
Tj = biv	Pdh	5,0	kW	Tj = biv	COPd	1,95			
Tj = TOL	Pdh	4,6	kW	Tj = TOL	COPd	1,75			
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd				
Bivalent temperature				T _{biv}	-7	°C	Operation limit temperature		
Cycling interval capacity for heating				P _{cyh}		kW	Cycling interval efficiency		
Degradation co-efficient				Cdh	0,96	-	Heating water operating limit		
							WTOL	58	°C
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>					
Off mode	P _{OFF}	0,007	kW	Rated heat output		P _{sup}	1,0	kW	
Thermostat-off mode	P _{TO}	0,011	kW						
Standby mode	P _{SB}	0,011	kW	Type of energy input		Electric			
Crankcase heater mode	P _{CK}	0,000	kW						
<i>Other items</i>									
Capacity control	Variable			Rated air flow rate, outdoors			2340	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	35/54	dB	Rated water flow rate, indoor heat exchanger				m ³ /h	
Annual energy consumption	Q _{HE}	3250	kWh	Rated brine or water flow rate, outdoor heat exchanger				m ³ /h	
<i>For heat pump combination heater:</i>									
Declared load profile		XL		Water heating energy efficiency		η_{wh}	107	%	
Daily electricity consumption	Q _{elec}	7,360	kWh	Daily fuel consumption		Q _{fuel}		kWh	
Annual electricity consumption	AEC	1564	kWh	Annual fuel consumption		AFC		GJ	
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							